

PRODUCT DATA SHEET

Altrove TW Suspension - Direct Light

MYWHITELIGHT®



DESIGN BY:

Carlotta de Bevilacqua
2010

MATERIALS:

Steel, Prismoptic, aluminium, methacrylate, PETG

DESCRIPTION:

In a m2 of surface where the light flows in a fluid way on transparent wires and, through a mirrored reflector, materializes a lighting and volumetric effect which is controlled. It is a cubic metre of light where everything is endlessly reflected, freely modulating more than a million of chromatic effects. The space is no more just one, but several, or simply "else", illusory perception of reality, which drives to a new place, elsewhere. Three versions are available, with three kind of light. Opening light: perimeter structure made of steel, top side mirror reflector, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate. Volumetric light: perimeter structure made of steel, top side segment reflector, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate. Fluid light: perimeter structure made of steel, side diffusers made of opaline methacrylate, front diffuser in transparent engraved methacrylate.

SELECT

FLUO

Mirror

PRODUCT CODE

1647010A

Light emission



Dimmable

TECHNICAL DATA SHEET

FEATURES

Product name:	Altrove TW Suspension - Direct Light
Article Code:	1647010A
Colour:	Mirror
Material:	Steel, Prismoptic, aluminium, methacrylate, PETG
Series:	Design, My White Light
Environment:	Indoor

OPTICS

Emission:	Diffused
-----------	----------

DIMENSIONS


Length:	cm 100
Width:	cm 100
Height:	cm 10
Max Height from ceiling:	cm 200
Impact Resistance:	N.D.
Glow Wire Test:	850 °

LAMPS INCLUDED

Category:	FLUO
Number:	2
Lbs:	T16
Watt:	39W
Socket:	G5
Type:	FDH-39
Luminous Flux (lm):	3500lm
Colour Rendering:	85
Colour temperature (K):	6500K

Category:	FLUO
Number:	2

DIMENSIONS

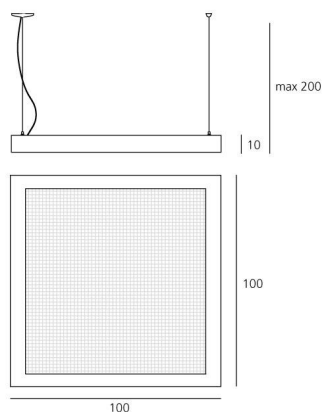

COLOUR



Lbs:

Watt:

Socket:

Type:

Luminous Flux (lm):

Colour Rendering:

Colour temperature (K):

T16

39W

G5

FDH-39

3100lm

85

3000K

LUMINAIR

Power Supply:

Watt:

Voltage:

Luminous Flux (lm):

CCT:

Dimmable

Electronic Integrated

78W + 78W

220V-240V

6650+7000lm

3000+6500K

ACCESSORIES

NO
IMAGE
AVAILABLE

ALTROVE 600 KIT
SOSP/ALIM.DIMM 1541010A